

V600

Adapt[®] V-Trak

better comfort all round

easiSpec


Seating Assessment Specification Form
incorporating the V-Trak[®] back system

User Weight






User Height

Min: 1510mm
Max: 2250mm

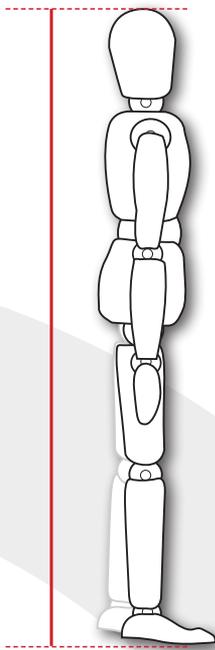

Chair Action

Asynchronous
Knee-Tilt

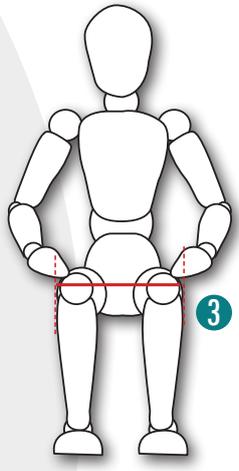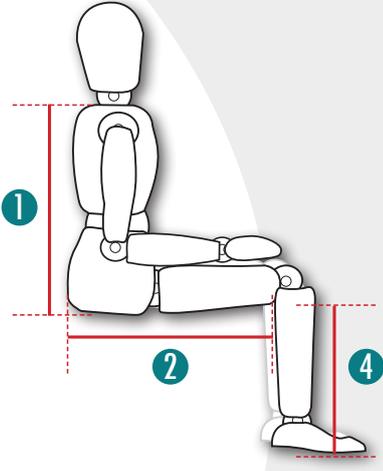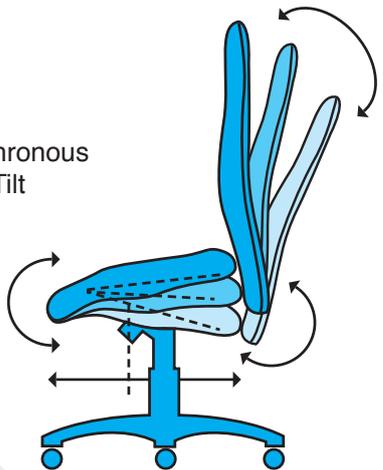

	Min	Max
① Seat to Shoulder (Back Height)	350mm	670mm
② Back of Buttock to Back of Knee (Seat Depth)	340mm	660mm
③ Hip Width at widest point (Seat width)	410mm	610mm
④ Floor to Underside of Knee (Seat Height)	430mm	630mm*

*Higher gas columns available for use in specific environments

Client

Company

Assessor


Date

Seating Assessment / Specification Form

BACK REST



Please tick box option and state the required dimensions if different from those shown

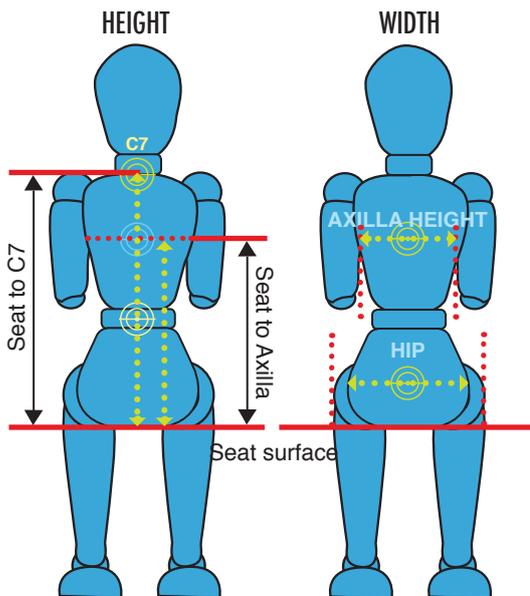

Use V600 measure to determine height at C7 and Axilla (H) and width at Pelvis and Axilla (arm pit) (W) then select the appropriate code from the matrix below

	WIDTH 1	WIDTH 2	WIDTH 3
HEIGHT 1	<input type="checkbox"/> 1/1	<input type="checkbox"/> 1/2	<input type="checkbox"/> 1/3
HEIGHT 2	<input type="checkbox"/> 2/1	<input type="checkbox"/> 2/2	<input type="checkbox"/> 2/3
HEIGHT 3	<input type="checkbox"/> 3/1	<input type="checkbox"/> 3/2	<input type="checkbox"/> N/A
HEIGHT 4	<input type="checkbox"/> N/A	<input type="checkbox"/> N/A	<input type="checkbox"/> 4/3


Height from seat to C7
Height from seat to Axilla

Width at pelvis (inc required wrap for support)
Width at Axilla (inc required wrap for support)

SEAT



Please tick box option and state the required dimensions if different from those shown

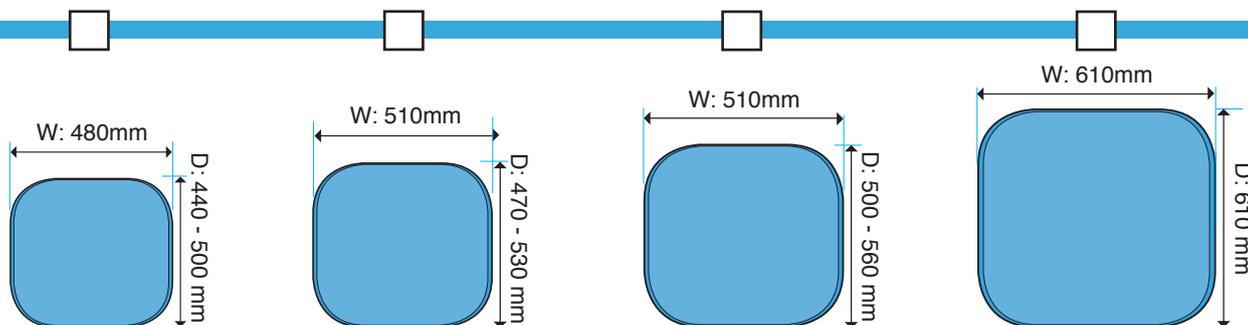

CHAIR CODE

V600 S

V600 M

V600 XL

V600 XXL

Width Reduction

REDW: to.....mm

REDW: to.....mm

REDW: to.....mm

REDW: to mm

Depth Reduction

REDD: to.....mm

REDD: to.....mm

REDD: to.....mm

REDD: to mm


- Use Back of Buttock to Back of Knee measurement and SUBTRACT 30mm to calculate optimum seat depth
- Use Hip to Hip measurement and ADD 50mm to calculate the optimum seat width
- **MINIMUM SEAT WIDTH IS 410mm AND MINIMUM SEAT DEPTH IS 340mm (with seat slide)**

▲ ON ▼ OFF

SEAT HEIGHT



Please tick required option approx heights

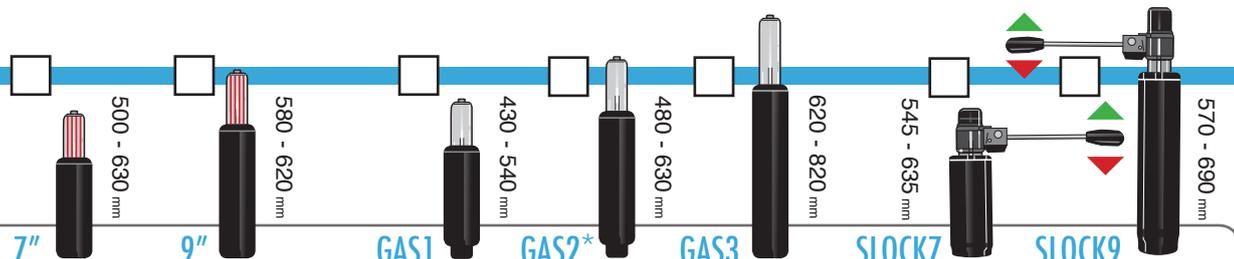

GAS CODE

NON SWIVEL GAS COLUMN


STANDARD GAS COLUMN

SWIVEL LOCK

BASE




Please tick required option

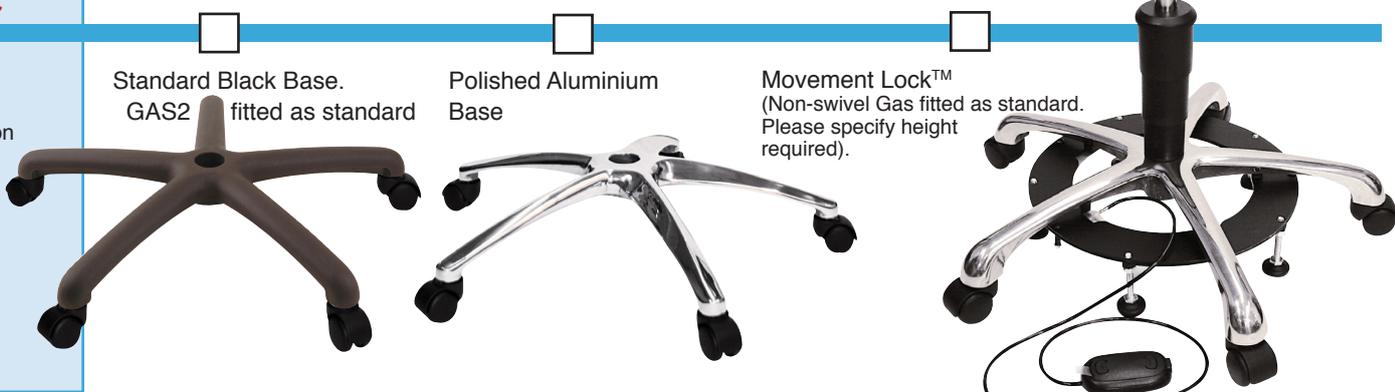

ARM OPTIONS

Level One Adaptations


Please tick required option

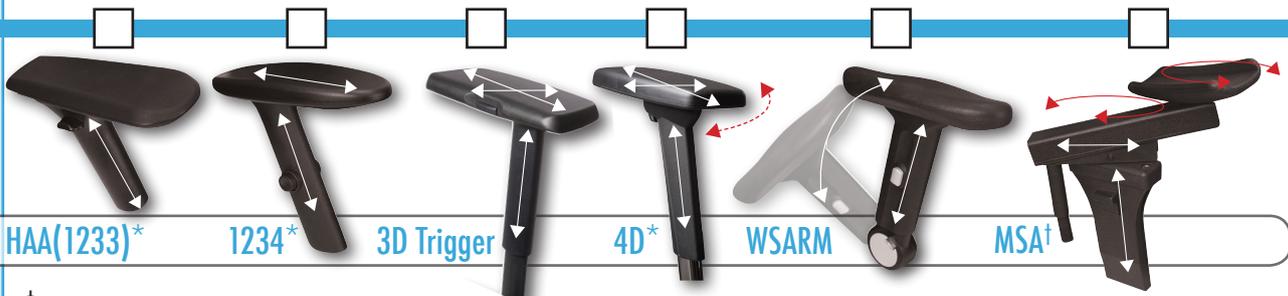

ARM CODE HAA(1233)* 1234* 3D Trigger 4D* WSARM MSA†

ARM PAD ENHANCEMENTS

Please tick required option

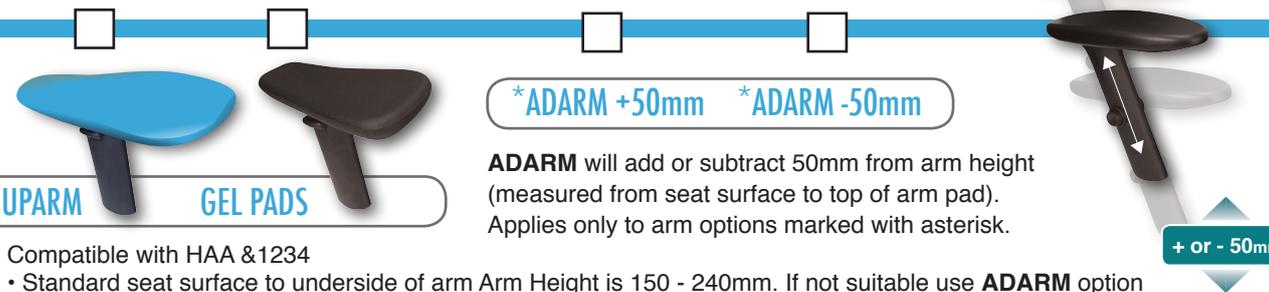


PAD CODE UPARM GEL PADS

Compatible with HAA & 1234
 • Standard seat surface to underside of arm Arm Height is 150 - 240mm. If not suitable use **ADARM** option

HEAD SUPPORT

Please tick required option

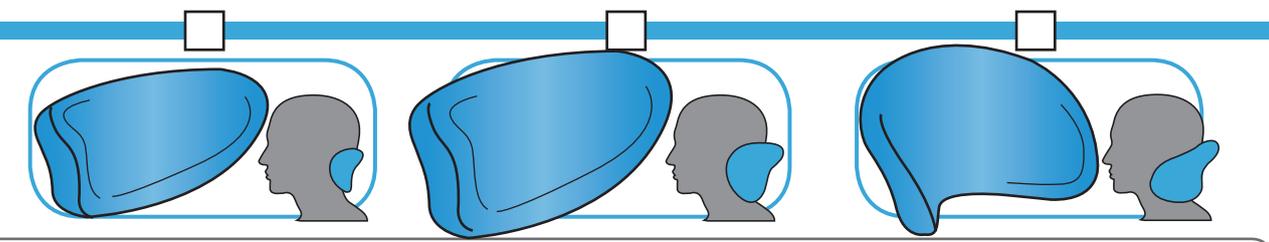


NECK CODE MED WING PAD LARGE WING PAD CRESCENT PAD

SEAT ENHANCEMENT


Level Two Adaptations

Please tick required option

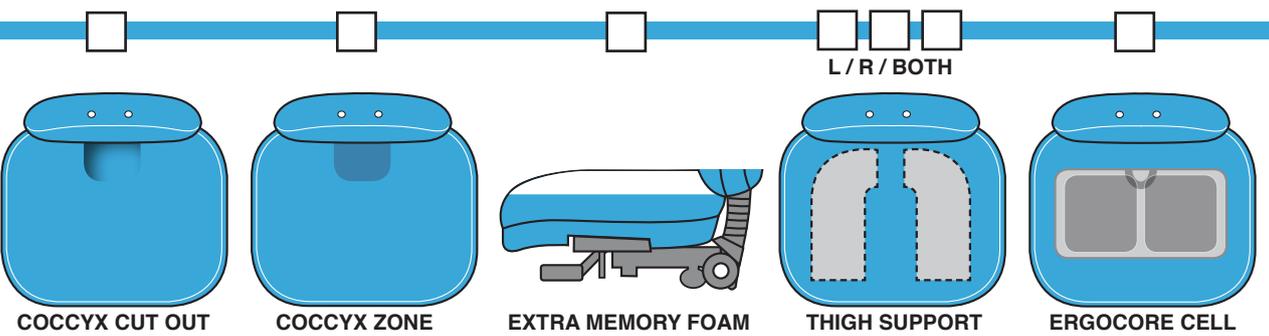

ENHANCE CODE /CC /CZ MFS L / R / BOTH /TS /ECORE

Please tick required option

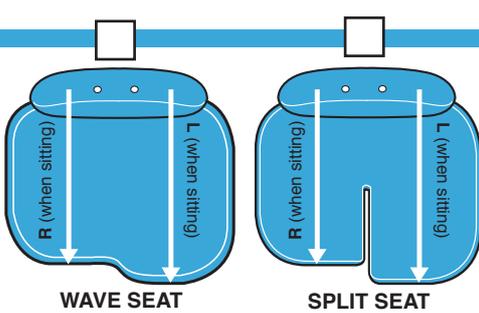

ENHANCE CODE WAVE SPLIT

Please specify required WAVE SEAT DEPTH
 ie. Back Buttock to Back of Knee L&R -30mm
 R (when sitting)mm
 L (when sitting)mm

**(OPTIONAL)
BACK
ENHANCEMENTS**

Level two Adaptations (continued)

Please tick box option and state the required dimensions if different from those shown


CODE **SACRAL CELL** **LUMBAR CELL**

CODE **/3LUM**


CODE **/VSR** **/VSL**

CODE **/THOR**


CODE **SEWN SEAT** **BESPOKE OR SHAPED SEAT**

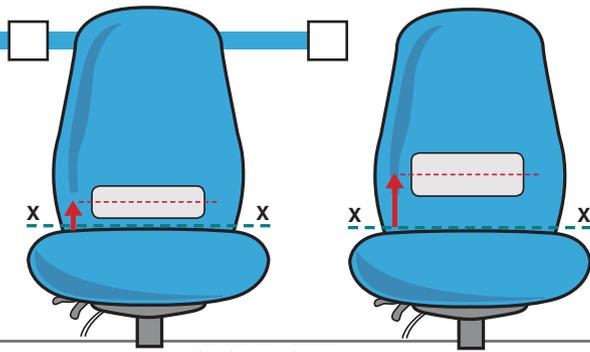


Measure distance from seat surface to centre of Air Cell and enter as X+

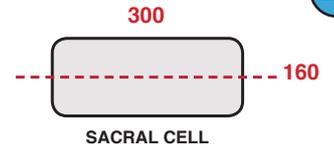


LOCATE CENTRE OF AIR CELL AT
X+mm

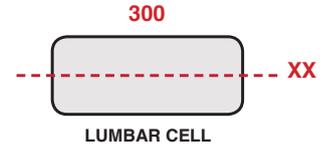


LOCATE CENTRE OF AIR CELL AT
X+mm

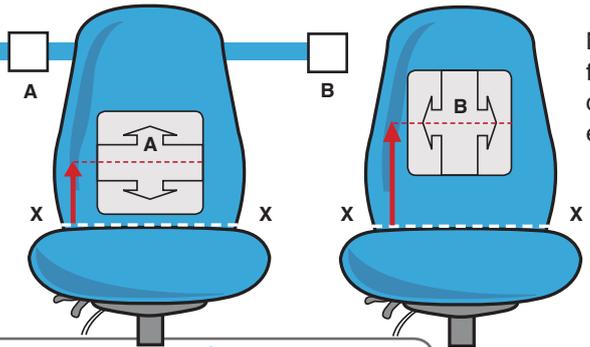

Measure distance from seat surface to centre of Air Cell and enter as X+

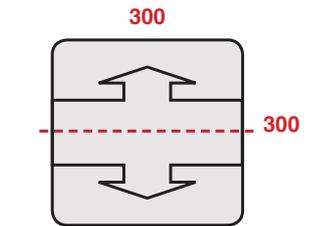


LOCATE CENTRE OF AIR CELL AT
X+mm

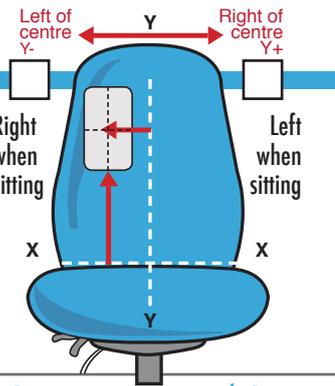


Measure distance from seat surface to centre of Air Cell and enter as X+

Measure distance from centre of back rest to centre of Air Cell and enter as Y+/-

Measure distance from seat surface to centre of Air Cell and enter as X+




LOCATE CENTRE OF AIR CELL AT
X+mm
Y+mm
Y-mm

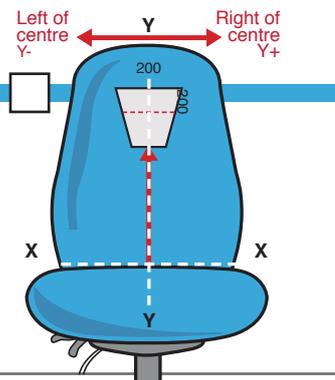

If not using centrally, measure distance from centre of back rest to centre of Air Cell and enter as Y+/-

A sewn seat will provide an even thickness of foam and a uniform tension of fabric across the surface of the seat resulting in a superior sit. This is particularly beneficial when specifying extra layers of memory foam in order to achieve a softer sit.




LOCATE CENTRE OF AIR CELL AT
X+mm
And (if not central)
Y+mm
Y-mm

SOFT WHEEL CASTORS
CODE **SWC**

BRAKE UNLOADED CASTORS
CODE **BUC**

BRAKE LOADED CASTORS
CODE **BLC**

STATIC GLIDES (FEET)
CODE **GLIDES**

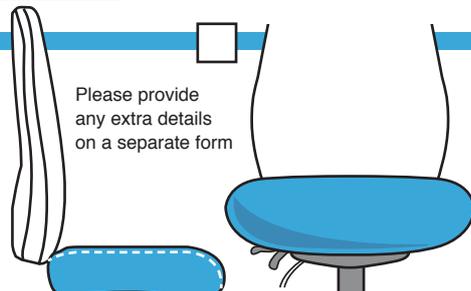

Please provide any extra details on a separate form