

AdaptLift[®] easiSpec


Seating Assessment / Specification Form

User Weight





User Height

Min: 1560mm
Max: 2100mm

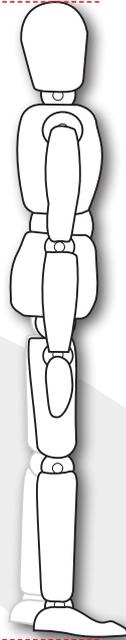

Chair Action

Max height 900mm and tilt (-4° to +20°) all at the touch of a button

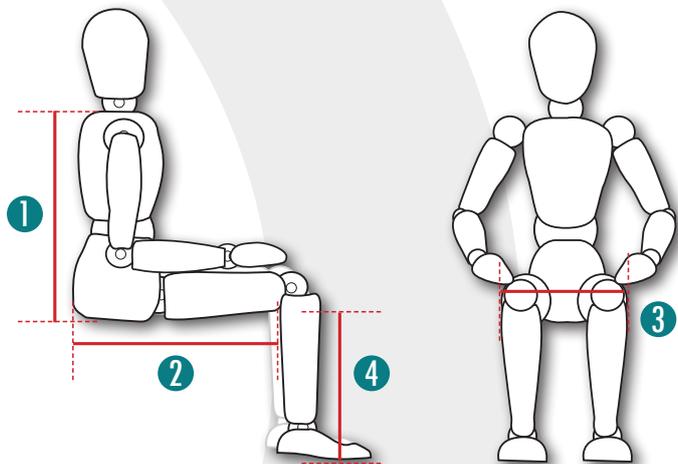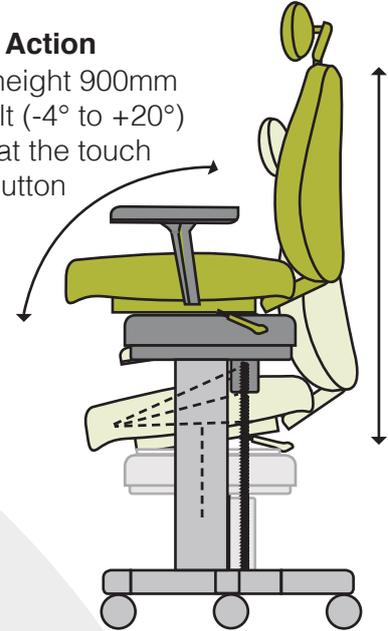

Built-in MLOCK™

AdaptLift also includes a built-in MLOCK™ braking system as standard

- ① Seat to Shoulder (Back Height)
- ② Back of Buttock to Back of Knee (Seat Depth)
- ③ Hip Width at widest point (Seat Width)
- ④ Floor to Underside of Knee (Seat Height - adjustable)

Min	Max
350mm	670mm
410mm	610mm
410mm	610mm
510mm	900mm

Client Company


Assessor Date

Seating Assessment / Specification Form 2

BACK REST



Please tick box option and state the required dimensions if different from those shown

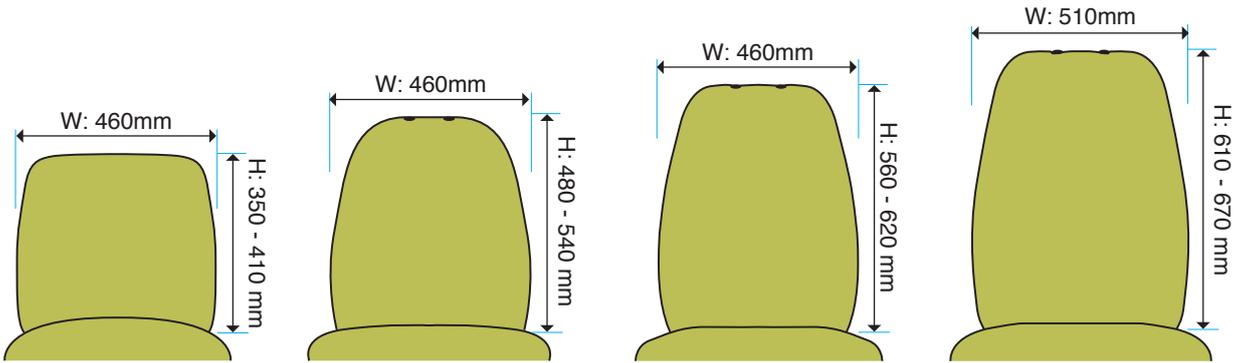

CHAIR CODE

Width Reduction
Height Reduction

610/640

REDBW: to mm

REDBH: to mm

620/650

REDBW: to mm

REDBH: to mm

630/660

REDBW: to mm

REDBH: to mm

680

REDBW: to mm


REDBH: to mm

- If using a neck support, subtract 80mm from the Nape of Neck measurement in order to calculate correct back height
- Back Heights may be increased by 75mm using the EXTD Extended Back Bar option - please contact us for details

SEAT



Please tick box option and state the required dimensions if different from those shown

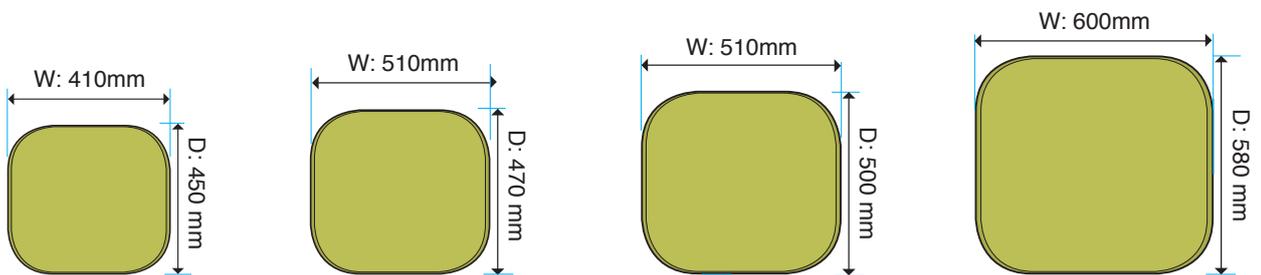

CHAIR CODE

Width Reduction
Depth Reduction

ALSS

Minimum Sizes

ALSM

REDW: to.....mm

REDD: to.....mm

ALSL

REDW: to.....mm

REDD: to.....mm

ALSXL

REDW: to mm


REDD: to mm

- Use Back of Buttock to Back of Knee measurement and SUBTRACT 30mm to calculate optimum seat depth
- Use Hip to Hip measurement and ADD 50mm to calculate the optimum seat width
- **MINIMUM SEAT WIDTH IS 410mm AND MINIMUM SEAT DEPTH IS 450mm**



Built-in MLOCK™

AdaptLift also includes a built-in MLOCK™ braking system as standard, to hold your chair still when you transfer in and out

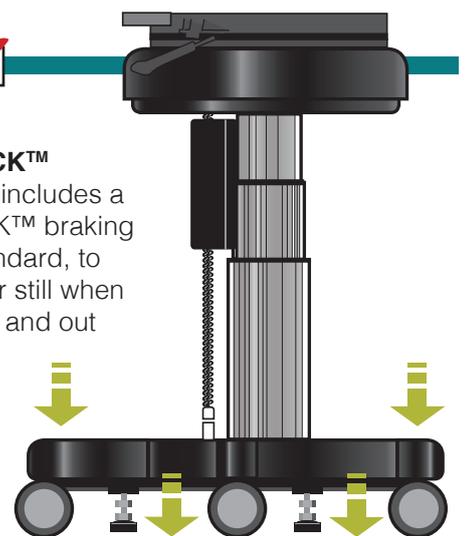

Level One Adaptations

ARM OPTIONS

Please tick required option

ARM CODE HAA(1233)* 1234* 3D Trigger 4D* WSARM MSA†

ARM PAD ENHANCEMENTS

Please tick required option

PAD CODE UPARM GEL PADS

*ADARM +50mm *ADARM -50mm

ADARM will add or subtract 50mm from arm height (measured from seat surface to top of arm pad). Applies only to arm options marked with asterisk.

Compatible with HAA & 1234
 • Standard seat surface to underside of arm Arm Height is 150 - 240mm. If not suitable use **ADARM** option

+ or - 50mm

HEAD SUPPORT

Please tick required option

HEAD CODE HEAD REST NECK ROLL NECK CURVE V-REST

SEAT ENHANCEMENT

Please tick required option

ENHANCE CODE /CC /CZ SMFS or /MFS /TS /ECORE

Please tick required option

ENHANCE CODE WAVE SEWN SEAT STANDARD

A sewn seat features as standard and will provide an even thickness of foam and a uniform tension of fabric across the surface of the seat resulting in a superior sit. This is particularly beneficial when specifying extra layers of memory foam in order to achieve a softer sit.


Please specify required **WAVE SEAT DEPTH** ie. Back Buttock to Back of Knee L&R -30mm
 R (when sitting)mm L (when sitting)mm

**(OPTIONAL)
BACK
ENHANCEMENTS**

Please tick box option and state the required dimensions if different from those shown


Level two Adaptations (continued)

Unless stated otherwise, lumbar cell position will be centered at approx 180mm above seat surface as standard


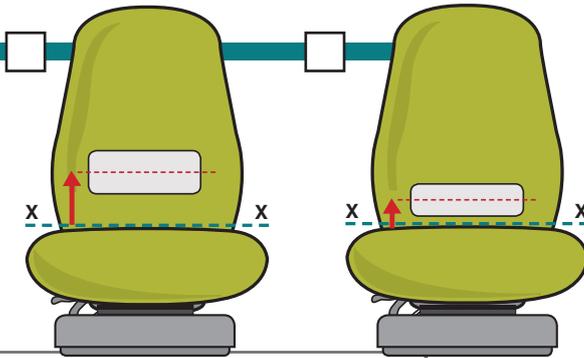


CODE **LUMBAR CELL** **SACRAL CELL**

Measure distance from seat surface to centre of Air Cell and enter as X+


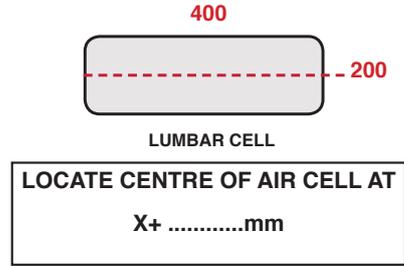


Measure distance from seat surface to centre of Air Cell and enter as X+

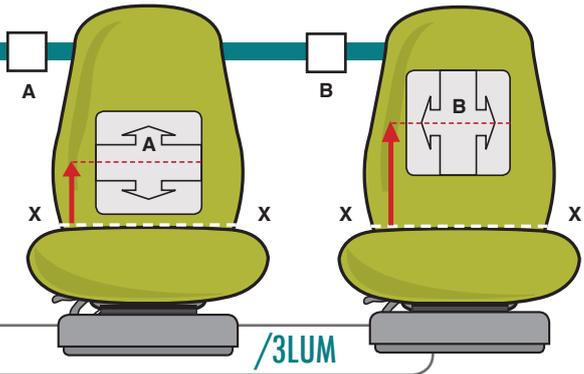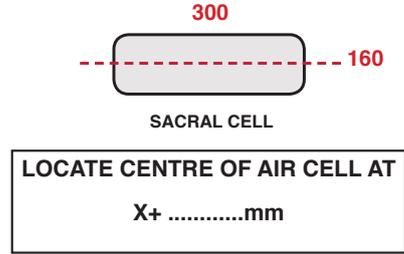

CODE **/3LUM**



Measure distance from seat surface to centre of Air Cell and enter as X+

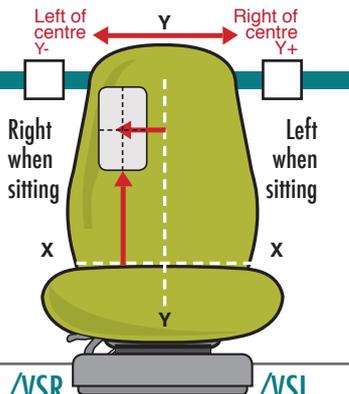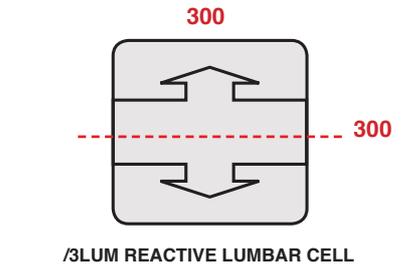

CODE **/VSR** **/VSL**

Measure distance from seat surface to centre of Air Cell and enter as X+


Measure distance from centre of back rest to centre of Air Cell and enter as Y+/-

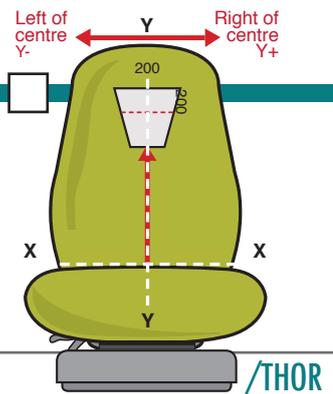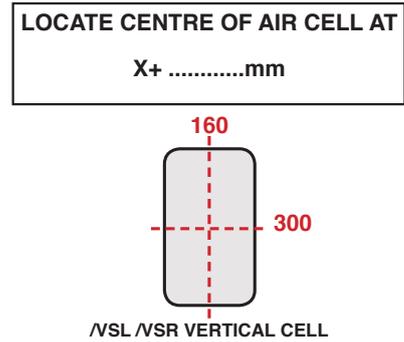


CODE **/THOR**

Measure distance from seat surface to centre of Air Cell and enter as X+

If not using centrally, measure distance from centre of back rest to centre of Air Cell and enter as Y+/-

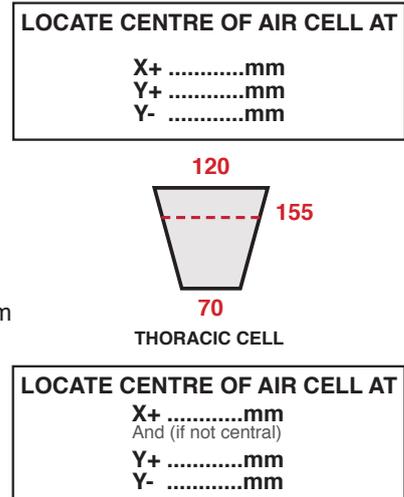

For the Sculpted Back Foam and Bespoke Seat Shaping please provide separate detailed information

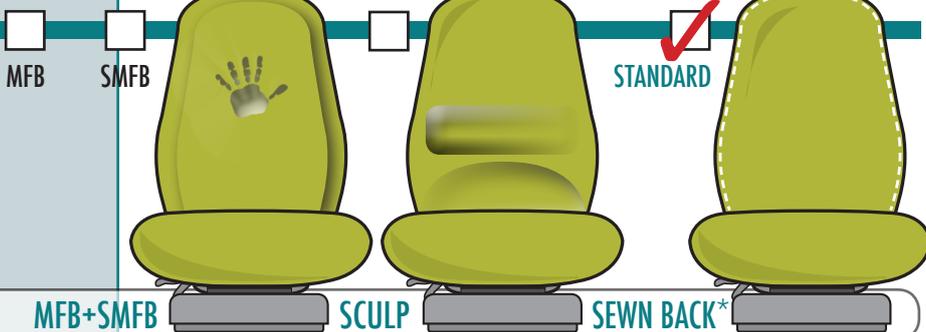

CODE **MFB+SMFB** **SCULP** **SEWN BACK***

* The Sewn Back version is standard and only available for the adapt®600 option and not for the V600